

TERRA




Automation systems
for swing gates



ATLAS GROUP

Atlas Group
868 Plymouth Road
Slough Trading Estate
Slough
Berkshire SL1 4LP

Tel: 01753 696166
Fax: 01753 696916
Email: info@atlasgroup.co.uk
Web: www.atlasgroup.co.uk

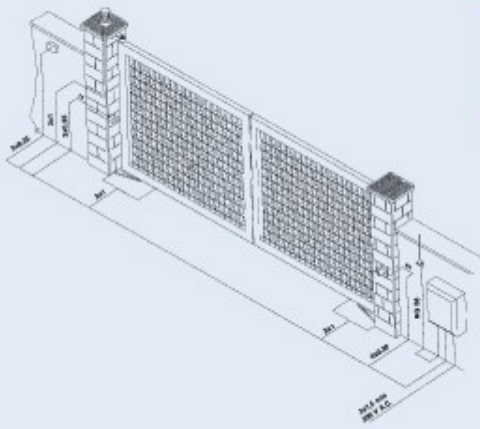


ELECTROMECHANICAL IRREVERSIBLE GEARMOTORS

- underground type
- waterproof and in oil-bath
- easy installation
- equipped with release device
- 180° opening angle when the special device 180 TER is added


ACCESSORIES

Control unit, safety photocells, radio-receiver unit, transmitter, key selector, aerial, push-button, flashing lamp, column for photocell

Technical Data	TERRA
Power supply	V A.C. 230
Motor power	W 310
Absorbed current	A 1,4
Torque	Nm 270
Reduction ratio	0,001
Degree of protection	IP 67
Class of insulation	F
Max wing weight	Kg 500
Interv. of overload prot.	130 °C
Operative temperature	-20°/+70 °C
Max swinging angle	110 °
Opening time	110° 14 Sec. 90° 11 Sec.
Condenser	µF 12,5
Lubrication	Olío Agip Blasía 32
Weight	Kg 20
Dimensions	mm 235x235xH295

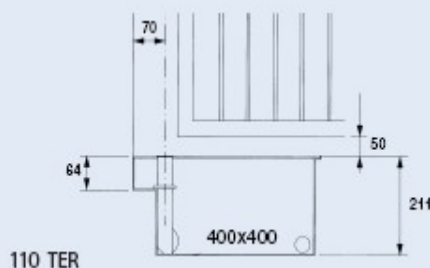

110 TER

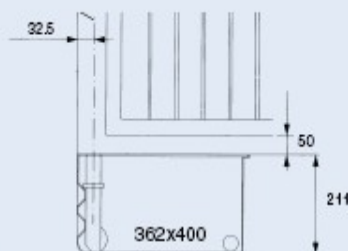

90 TER

